

10/20/00
jc535 U.S. PTO

LAW OFFICES
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC
2100 PENNSYLVANIA AVENUE, N.W.
WASHINGTON, DC 20037-3213
TELEPHONE (202) 293-7060
FACSIMILE (202) 293-7860
www.sughrue.com

jc806 U.S. PTO
09/692043
10/20/00

October 20, 2000

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Re: Application of Hideyasu ISHIBASHI
METHOD AND APPARATUS FOR COMPRESSING MULTISPECTRAL IMAGES
Our Ref. Q61360

Dear Sir:

Attached hereto is the application identified above including forty-four (44) sheets of the specification, claims, three (3) sheets of drawings, Preliminary Amendment, executed Assignment and PTO 1595 form, and executed Declaration and Power of Attorney.

The Government filing fee is calculated as follows:

Total claims	7 - 20	=		x	\$18.00	=	\$0.00
Independent claims	2 - 3	=		x	\$80.00	=	\$0.00
Base Fee							\$710.00
TOTAL FILING FEE							\$710.00
Recordation of Assignment							\$40.00
TOTAL FEE							\$750.00

Checks for the statutory filing fee of \$710.00 and Assignment recordation fee of \$40.00 are attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16 and 1.17 and any petitions for extension of time under 37 C.F.R. § 1.136 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from October 20, 1999 based on JP Application No. 11-297895. The priority documents is enclosed herewith.

Respectfully submitted,
SUGHRUE, MION, ZINN,
MACPEAK & SEAS, PLLC
Attorneys for Applicant

By:

Darryl Mexic

Registration No. 23,063

Registration No. 32,778

DM/plr

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Hideyasu ISHIBASHI

Appln. No.: Not Yet Assigned

Group Art Unit:

Filed: October 20, 2000

Examiner:

For: METHOD AND APPARATUS FOR COMPRESSING MULTISPECTRAL IMAGES

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to examination, please amend the above-identified application as follows:

IN THE SPECIFICATION:


Page 39 line 12, please remove lines 12 - 22 starting with "WHAT IS CLAIMED IS:",
and ending in "multispectral image"; and insert the same on page 40 before line 1.

REMARKS

Entry and consideration of this Amendment is respectfully requested.

Respectfully submitted,

SUGHRUE, MION, ZINN,
MACPEAK & SEAS, PLLC
2100 Pennsylvania Avenue, N.W.
Washington, D.C. 20037-3213
Telephone: (202) 293-7060
Facsimile: (202) 293-7860
Q61360
Date: October 20, 2000

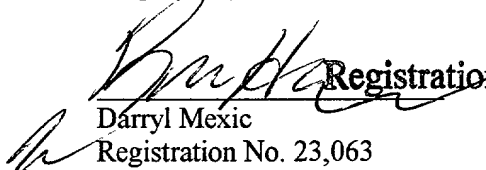 Registration No. 32,778
Darryl Mexic
Registration No. 23,063

METHOD AND APPARATUS FOR COMPRESSING
MULTISPECTRAL IMAGES

BACKGROUND OF THE INVENTION

This invention relates to an image data compressing technology by which image data for a multispectral image reconstructed from a plurality of band images of an object captured in a wavelength range as divided into a plurality of bands can be efficiently compressed without impairing the quality of the image.

With the recent advances in digital image processing, it has become possible to provide a complete representation of image's color information (lightness, hue and saturation) by a multispectral image which carries spectral information for each of its pixels. To produce a multispectral image, an object is recorded in divided wavelength bands and on the basis of a multiband image consisting of the captured band images, the spectral reflectance distribution is estimated for each band image. The multiband image can reproduce the color information that cannot be fully represented by the conventional RGB color images consisting of red (R), green (G) and blue (B) images and will prove effective in the art world which

needs more accurate color reproduction. In order to make the most of the capability for correct reproduction of color information, the multispectral image is desirably produced from a multiband image having as many bands as possible, say, 41 bands which are obtained by dividing a recording wavelength range of from 380 to 780 nm by 10 nm or even 81 bands by dividing the range by 5 nm.

A problem with the multispectral image having spectral information for each pixel is that it possesses spectral reflectance data for each group of the channels, say, 41 channels, into which the recording wavelength range has been divided and that compared to the conventional 3-channel RGB color images, the volume of the required image data is about 13 times as much ($41/3$). This means a large storage capacity and a prolonged time are required to save the image data for multispectral images. In addition, so much time is taken to transfer the image data over a communication network that great difficulty is involved in data handling.

To deal with this situation, Keusen proposed an improved technique in which spectral waveforms obtained from spectral information for each of the pixels in a multispectral image were expanded into three color matching

functions as of the RGB colorimetric system and those portions of the spectral waveforms that could not be expressed by color matching functions were expanded into basis vectors by principal component analysis and those principal components which were representative of the image information for the spectral images were extracted and adopted but other principal components were discarded so that the spectral waveforms of interest were eventually expressed by a total of six to eight basis vectors including the color matching functions [Th. Keusen, Multispectral Color System with an Encoding Format Compatible with the Conventional Tristimulus Model, Journal of Imaging Science and Technology 40: 510 to 515, (1996)]. In accordance with this method, the image data for the multispectral image can be compressed by expressing the spectral waveforms in terms of six to eight basis vectors and their multispectral coefficients. In particular, if the spectral waveforms are expressed by the color matching functions of the RGB colorimetric system, their coefficients are R, G and B tristimulus values and the image can be directly sent for subsequent processing without performing any special transformations in order to provide compatibility for the conventional image processing

and display apparatus which employ the tristimulus values of R, G and B pixels. This is a great benefit to the purpose of reducing the volume of data processing.

If a multispectral image consisting of 41 spectral images is expressed by eight basis vectors and their multispectral coefficients according to the method described above, the image data to be handled can be compressed to about 20% of the initial volume ($8/41 \times 100$). Compared to the RGB color image, the volume of the image data for the multispectral image composed of 41 spectral images is about 13 times as much and even if it is reduced to about 30% of the initial value by the Keusen method, the volume is still as much as about 2.5 times the image data for the RGB color image ($13 \times 20/100$). As a result, the aforementioned problem of the prior art still remains and the time for recording and storing the image data on recording media as well as the time for transferring them over a communication network are long enough to present difficulty in data handling.

SUMMARY OF THE INVENTION

The present invention has been accomplished under these circumstances and has as an object providing a method

by which a multispectral image reconstructed from a plurality of spectral images obtained by recording an object in a wavelength range as divided into a plurality of bands can be compressed at an increased ratio but without causing visual deterioration and which thereby improves the efficiency of image data handling.

Another object of the invention is to provide an apparatus for implementing the method.

In order to attain the object described above, the present invention provides a method of compressing a multispectral image composed of a plurality of spectral images of an object captured in a wavelength range divided into a plurality of bands, comprising the steps of segmenting the multispectral image into a plurality of tile images, performing principal component analysis on respective tile images to obtain for each tile image a principal component number of sets of principal component vectors and principal component images for the multispectral image, determining from the plurality of sets, for each tile image, an optimum principal component number of sets of optimum principal component vectors and corresponding optimum principal component images that optimally represent image information about the

2025 RELEASE UNDER E.O. 14176

multispectral image, and expressing compressed image data for the multispectral image by means of at least the optimum principal component number of sets of optimum principal component images and optimum principal component vectors for each tile image.

Preferably, the compressed image data for the multispectral image are expressed not only by the optimum principal component number of sets of the optimum principal component images and the optimum principal component vectors but also by tile image information having information about tile numbers of the tile images, a tile position and an image size of the tile images.

Preferably, the optimum principal component number is determined based on colorimetric values in a color space.

Preferably, the optimum principal component number is a minimum principal component number at which an absolute value of difference between image information about a composite image that is composed of selected number of sets of the principal component vectors and the principal component images and the image information about an original image that is composed based on the multispectral image is below a specified value or an absolute value of variation in error from the original image which is

presented when the composite image is determined by sequentially including in an order of contribution those principal component vectors which make greater contribution to the multispectral image does not exceed a predetermined value.

Preferably, an image size of the tile images in terms of pixel is expressed as a power notation of 2 in both a longitudinal and a transverse direction.

Preferably, the tile images all have an image size in terms of pixel.

In order to attain another object described above, the present invention provides an apparatus for compressing a multispectral image composed of a plurality of spectral images of an object captured in a wavelength range divided into a plurality of bands, comprising an image segmenting section for segmenting the multispectral image into a plurality of tile images, a principal component analyzing section in which respective tile images obtained in the image segmenting section are subjected to principal component analysis to obtain for each tile image a principal component number of sets of principal component vectors and principal component images for the multispectral image, and an optimum principal component

vector/image extracting section which determines an optimum principal component number of sets of optimum principal component vectors and optimum principal component images that optimally represent image information about the multispectral image from the principal component number of sets of principal component vectors and principal component images as obtained in the principal component analyzing section, and wherein image data for the multispectral image is compressed by expressing by means of at least the optimum principal component vectors and the image data for the optimum principal images for each tile image as obtained in the optimum component vector/image extracting section.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows in conceptual form an exemplary multispectral image acquisition system including the multispectral image compressing apparatus according to the second aspect of the invention;

Fig. 2 is a block diagram for an example of the multispectral image compressing apparatus;

Fig. 3 illustrates how an image is segmented into tile images in the practice of the multispectral image

compressing method according to the first aspect of the invention; and

Fig. 4 is a flowchart for an example of the multispectral image compressing method.

THE PREFERRED EMBODIMENT OF THE INVENTION

A multispectral image acquisition system for implementing the multispectral image compressing method according to the first aspect of the invention is described below in detail by reference to the preferred embodiment shown in the accompanying drawings.

Fig. 1 shows a multispectral image acquisition system for implementing the multispectral image compressing method according to the first aspect of the invention and which includes the multispectral image compressing apparatus according to the second aspect of the invention.

The multispectral image acquisition system (hereunder referred to simply as "the system") which is generally indicated by 10 takes a multispectral image of an object 0 and stores the captured image data on a recording medium. Its principal components are as follows: a light source 12 for illuminating the object 0; a variable filter 14 for dividing the recording wavelength range into a plurality of

bands; a CCD camera 16 for taking a multiband image of the object O; a multiband image storage section 18 for saving the captured image data temporarily; a multispectral image acquisition unit 20 for reconstructing a multispectral image from the multiband image by estimating the spectral reflectance distribution for each pixel; a multispectral image compressing unit 22 for compressing the image data for the multispectral image at a higher ratio while suffering limited visual deterioration; and a recording medium drive unit 24 for saving the compressed image data. In the present invention, the multispectral image has preferably at least six channels of spectral images and, hence, at least six constituent wavelengths in the spectral reflectance distribution.

The light source 12 for illuminating the object O is not limited in any particular way as regards type and other factors; however, for the purpose of reconstructing a multispectral image from the captured multiband image by estimating the spectral reflectance distribution, the light source 12 is preferably one with a known spectral intensity distribution.

The variable filter 14 is a bandpass filter with which the recording wavelength range can be divided into a

variable number of bands, say, 16, 21, 41 or 81 bands for the purpose of capturing a multiband image of the object 0. A useful example of the variable filter 14 is a liquid-crystal tunable filter.

The CCD camera 16 is a device with which the object 0 imaged by the light reflected from it to pass through the variable filter 14 so that it is segmented into a desired number of spectral wavelength bands is captured as black-and-white band images. The image-receiving plane of this camera has a planar array of CCDs (charge-coupled devices) as area sensors. For proper setting of the dynamic range for the lightness values of the image to be taken, the CCD camera 16 includes a mechanism for adjusting the white balance before taking the picture of the object 0.

The multiband image data storage unit 18 is a site for temporary storage and saving of the multiband image composed of a plurality of band images that have been captured in the recording wavelength range as divided into multiple bands and which have the white balance adjusted in association with the respective bands.

The multispectral image acquisition unit 20 has one-dimensional look-up tables (1D LUTs) constructed preliminarily on the basis of the correspondence between

000001 24026960

the image data for objects with known values of spectral reflectance that were captured with the CCD camera 16, for example, the image data for the gray patches on a Macbeth chart, and the known values of spectral reflectance. Using the 1D-LUTs and on the basis of the image data for the multiband image of the object O that have been retrieved from the multiband image data storage unit 18, the multispectral image acquisition unit 20 estimates the spectral reflectance of the object O for each pixel and acquires the multispectral image.

If the variable filter 14 has such filter characteristics that its spectral transmittance distribution partly overlaps between bands, the acquired multispectral image does not have a sharp enough spectral reflectance distribution to assure highly precise estimation of the spectral reflectance distribution of the object O. To avoid this problem, such filter characteristics may be eliminated by deconvolution through matrix operations and Fourier transformation.

In this way, the multispectral image having an n-wavelength spectral reflectance distribution as spectral information is acquired from the multiband image captured

000001: 24025360

with the aid of the variable filter 14 that divided the recording wavelength range into n bands.

The recording medium drive unit 24 records the image data for the multispectral image on various kinds of recording media such as hard disk, floppy disk, MO, CD-R and DVD after they have been compressed by the multispectral image compressing unit 22 to be described later. In addition to or in place of the recording medium drive unit 24, a network coupler may be installed so that the compressed multispectral image data to be described later can be transferred over a variety of communication networks.

The multispectral image compressing unit 22 is a site at which the multispectral image data that constitutes the multispectral image obtained by the multispectral image acquisition unit 20 is compressed at high ratio while suffering only limited visual deterioration. As shown in Fig. 2, the multispectral image compressing unit 22 comprises an image segmenting section 22a, a principal component analyzing section 22b and an optimum principal component vector/image extracting section 22c. If desired, the multispectral image compressing unit 22 may be composed

of software having the capabilities set forth below or it may be configured as a single hardware unit.

The image segmenting section 22a is a site where the image obtained by the multispectral image acquisition unit 20 is segmented into n_t tile images T_L ($L = 1$ to n_t). To give just one example, a multispectral image consisting of 1024×1024 pixels may be segmented into tile images T_L each consisting of 16×16 pixels. The size of tile images T_L must be such that their total number of the pixels in each tile image T_L is at least greater than the number of constituent wavelengths in the spectral reflectance distribution for each of the pixels in the multispectral image. If this condition is not met, highly precise principal component vectors cannot be determined in a principal component analysis to be discussed below.

Fig. 3 shows an example of segmenting the multispectral image into tile images T_L . In the illustrated case, the multispectral image is segmented in eight rows and eight columns to obtain 64 tile images T_L of identical size. Tile images of identical size permit easy processing in the analysis of principal components and the construction of image information that are to be discussed later. Preferably, the longitudinal and transverse sizes

of each tile image T_L are such that the number of pixels can be expressed as a power notation of 2. This is in order to provide convenience for retrieving the compressed image data and performing necessary processing.

In the embodiment under discussion, all tile images T_L are of the same size but this is not the sole case of the invention and the size of tile images T_L may be varied as appropriate for the contents of the image. For example, if the background of the image is the sky, the ground or the like that has small changes in hue, lightness or saturation, the size of the tile images T_L in such background may be increased; on the other hand, the tile images T_L in a portion that includes the object and the like which has marked changes in hue, lightness or saturation may have a smaller size. Varying the tile image size contributes to an enhanced compression ratio.

As long as the total number of pixels in each tile image T_L is at least greater than the number of constituent wavelengths, the size of the tile image T_L , its aspect ratio and other factors are not limited in any particular way.

The principal component analyzing section 22b is a site where the principal components of the spectral

reflectance distribution possessed by each of the pixels in the tile images T_L ($L = 1$ to n_t) into which the multispectral image has been segmented are analyzed and the spectral reflectance distribution for each pixel is expanded into principal components. In the following discussion, the number of wavelength bands is assumed to be n .

The principal component analysis to be performed in the present invention is commonly called "optimum sampling" which is one of the methods for sampling a group of observed waveform data by expansion into orthonormalized basis functions. This is a method for providing the most precise representation of the observed waveform data by weighted averaging of the least number of orthogonal basis functions. In the following discussion, the orthogonal basis functions are called "principal component vectors".

A specific procedure for the principal component analysis to be performed in the present invention is this. On the basis of the observed waveform for each of the pixels in the tile images T_L ($L = 1$ to n_t) into which the multispectral image has been segmented, linearly independent eigenvectors that are inherent in the observed waveforms are determined as principal component vectors by

statistical and eigenvalue analyzing techniques. From the thus determined principal component vectors, those principal component vectors having such small eigenvalues that would be reduced to zero if the observed waveforms had no noise component are eliminated to determine a smaller number of optimum principal component vectors than n , or the number of wavelength bands. The observed waveforms are linearly expressed by these optimum principal component vectors. For details of this method, see "Kagaku Keisoku no tameno Hakei Data Shori (Waveform Data Processing for Scientific Measurement and Instrumentation)", ed. and written by S. Minami, pp. from 220 to 225, CQ Publishing Co., 1986. The principal component analysis is primarily performed in the principal component analyzing section 22b and the optimum principal component vector/image extracting section 22c to be described later.

The principal component analysis is preferably performed in the case where the observed spectral reflectance waveform for each of the pixels in the tile images T_L ($L = 1$ to n_t) into which the multispectral image has been segmented can be expressed linearly and where the noise component in that waveform is also independent of the value of spectral reflectance.

We now describe the procedure of principal component analysis with particular reference being made to the embodiment under consideration. For each pixel, the tile images T_L ($L = 1$ to n_t) into which the multispectral image has been segmented have the values of spectral reflectance distribution R which are equal in number to n , or the number of bands into which the wavelength for recording the object has been divided by means of the variable filter 14. To be more specific, the tile images T_L have the spectral reflectance distribution R that has n constituent wavelengths corresponding to n bands and which consists of n values of spectral reflectance. In addition, the total number of pixels in the tile images T_L is greater than n , or the number of constituent wavelengths. Hence, by means of a statistical treatment that is independent of the pixel position in the images, namely, by expressing the spectral reflectance distribution $R(i,j,\lambda)$ in the form of an n -dimensional vector, i.e. $[R(i,j,\lambda_1), R(i,j,\lambda_2), R(i,j,\lambda_3), \dots, R(i,j,\lambda_n)]^T$ (superscript T represents transposition, (i,j) the position of a pixel of interest, and λ the spectral wavelength) and determining an autocorrelation matrix T of this R for all pixels in the tile images T_L ,

principal component analysis of the spectral reflectance can be performed statistically.

The principal components to be determined by principal component analysis are obtained by statistical treatments. To give an example, principal component vectors $p_k(\lambda)$ (k is an integer between 1 and n) which are eigenvectors of an orthonormalized autocorrelation matrix T consisting of n spectral reflectance values corresponding to n bands are determined as a plurality of sets with eigenvalues u_k ($k = 1$ to n) of the autocorrelation matrix T . The principal component vectors $p_k(\lambda)$ ($k = 1$ to n) are used to obtain a linear expansion of the spectral reflectance distribution $R(i,j,\lambda)$ for the tile images T_L at pixel position (i,j) , as well as to determine the coefficients $s_k(i,j)$ ($k = 1$ to n) for the respective principal component vectors $p_k(\lambda)$ ($k = 1$ to n); thereafter, principal component images S_k ($k = 1$ to n) are obtained that use those coefficients as image data at the pixel position (i,j) .

Principal component analysis is performed on the respective tile images T_L ($L = 1$ to n_t) and the principal component vectors $p_k(\lambda)$ ($k = 1$ to n) and the principal component images S_k ($k = 1$ to n) that have been obtained

In the optimum principal component vector/image extracting section 22c, the principal component vectors $p_k(\lambda)$ ($k = 1$ to n) that have been obtained for each tile image T_L ($L = 1$ to n_t) in the principal component analyzing section 22b and the corresponding principal component images S_k ($k = 1$ to n) also obtained in 22b are used to determine an optimum principal component number m_1 for each tile image T_L ($L = 1$ to n_t), which is used to extract optimum principal component vectors $p_k(\lambda)$ ($k = 1$ to m_1) and optimum principal component images S_k ($k = 1$ to m_1) for each tile image T_L ($L = 1$ to n_t).

To be more specific, from the sets of the n principal component vectors $p_k(\lambda)$ ($k = 1$ to n) for the tile images T_L and the corresponding principal component images S_k ($k = 1$ to n), the sets of m ($m < n$) principal component vectors $p_k(\lambda)$ ($k = 1$ to m) and the corresponding principal component images S_k ($k = 1$ to m) are chosen and used to determine a composite image. The error in image information that may be possessed by this composite image

as compared with the original tile images T_L is used to determine whether the m principal component vectors $p_k(\lambda)$ ($k = 1$ to m) and the corresponding principal component images S_k ($k = 1$ to m) are really optimum principal components.

The principal component vectors $p_k(\lambda)$ for the tile images T_L are such that the greater the corresponding eigenvalue u_k , the greater the contribution the principal component makes to the spectral reflectance distribution of each tile image T_L . Considering this fact, the principal component vectors $p_k(\lambda)$ are lined up in the decreasing order of eigenvalue u_k and composite images are reconstructed under a given illuminating light source by adopting an increasing number of principal component vectors having the larger eigenvalues u_k . In this process, the error in image information the composite image has with respect to the original tile images T_L each composed of n principal component vectors decreases monotonically with the increase in m , or the number of the principal component vectors to be adopted. Therefore, the principal component vector number m at which the above-mentioned error first decreases below a predetermined value can be taken as a

minimum optimum principal component number m_1 . As a result, the principal component vectors adopted to determine a composite image with the optimum principal component number m_1 and the principal component images obtained on the basis of these vectors can respectively be extracted as optimum principal component vectors $p_k(\lambda)$ ($k = 1$ to m_1) and optimum principal component images S_k ($k = 1$ to m_1) for the tile images T_L . Such optimum principal component vector $p_k(\lambda)$ ($k = 1$ to m_1) and optimum principal component image S_k ($k = 1$ to m_1) are determined for each tile image T_L .

The term "image information" as used herein means colorimetric values L^* , a^* and b^* as measured in the CIEL*a*b* color space under a given light source such as the CIED₆₅ standard illuminant, and the "error" in such image information is the color difference ΔE_0 expressed by the following equation (1). The optimum principal component m_1 can be determined by finding the principal component image number m at which the color difference ΔE_0 is below a predetermined value, say, 1.0:

$$\Delta E_0 = \{ (\Delta L^*)^2 + (\Delta a^*)^2 + (\Delta b^*)^2 \}^{1/2} \quad (1)$$

where ΔL^* , Δa^* and Δb^* represent the differences the composite image has with respect to the tile images T_i in terms of the average colorimetric values L^* , a^* and b^* measured for all or part of the image. Thus, the optimum principal component number m_1 is adaptively determined on the basis of the color differences ΔE_0 between the colorimetric values of the composite image in a color space and those of the original image.

The error in the image information may be the square error E_1 from the original image of the spectra for the pixels in all or part of the tile images of the composite image reconstructed by the m principal component vectors p_k . The image data for the spectra having spectral information in correspondence with the bands of the composite image can also be regarded as an example of colorimetric values and the optimum principal component number m_1 may be adaptively determined on the basis of the square error E_1 between the spectral image data that are the colorimetric values of the composite image in a color space and the spectral image data which are the colorimetric values of the original image. Since the square error E_1 or $\log(E_1)$ decreases monotonically with the

principal component vector number m , the optimum principal component number m_1 may be determined by increasing m and finding the value of m at which the amount of decrease in the square error E_1 or $\log(E_1)$ becomes smaller than a predetermined value, or a minimum value of m at which the decrease in the square error E with increasing m is saturated below a predetermined value may be substituted.

The obtained tile information consists of the optimum principal component number m_1 , optimum principal component vectors $p_k(\lambda)$ ($k = 1$ to m_1) and the image data for the optimum principal component images S_k ($k = 1$ to m_1) is sent to the recording medium drive unit 24 as compressed multispectral image data together with the tile image information that was constructed when the multispectral image was segmented into tile images T_L in the image segmenting section 22a and which consists of the tile number of each tile image T_L , the tile position on the multispectral image, tile size (image size) of each tile image T_L and the pointer (address) for the tile information.

Having described the configuration of the system 10, we next describe the sequence of steps in the method of the invention for compressing multispectral images by the

system 10. The reader of the following description should refer to Fig. 4 for better understanding of the invention.

First, the object O is recorded with a multiband camera consisting of the light source 12, variable filter 14 and CCD camera 16 to acquire a multiband image which consists of a plurality of band images corresponding to the n bands into which the recording wavelength range has been divided (step 100). The acquired multiband image is temporarily stored in the multiband image data storage unit 18 and then sent to the multispectral image acquisition unit 20.

The multispectral image acquisition unit 20 has one-dimensional look-up tables (1D-LUTs) typically constructed from the correspondence between the image data for gray patches on a Macbeth chart and the values of their spectral reflectance. Using these 1D-LUTs as well as the image data for the multiband image of the object O that has been retrieved from the multiband image data storage unit 18, the unit 20 estimates the pixel-based spectral sensitivities of the object O and acquires the image data for the multispectral image (step 102). To estimate a highly precise spectral reflectance distribution for the

object 0, deconvolution may optionally be performed by matrix operations and Fourier transformation.

In the next step 104, the image data for the multispectral image is segmented in a tile format to produce tile images T_L ($L = 1$ to n_t). At the same time, tile image information as header information is constructed and this information comprises the tile number of each tile image T_L , the tile position on the multispectral image, the tile size (image size) of each tile image T_L and the pointer (address) for the tile information (to be described later) which consists of the optimum principal component number m_1 , optimum principal component vectors $p_k(\lambda)$ and the image data for the optimum principal component images S_k .

As Fig. 3 shows, all tile images T_L ($L = 1$ to n_t) have identical image size from the viewpoint of easy processing. If desired, in order to increase the compression ratio, the size of the tile images M_L may be varied as appropriate for the contents of the original image.

In the next step 106, principal component analysis is performed for each of the tile images T_L ($L = 1$ to n_t) in order to determine principal component images S_k ($k = 1$ to

n) and principal component vectors $p_k(\lambda)$ ($k = 1$ to n). The process of this principal component analysis is described below.

At the pixel position (i,j) , each tile image T_L has a spectral reflectance distribution having n spectral reflectance values. If this spectral reflectance distribution is written as $R(i,j,\lambda) = [R(i,j,\lambda_1), R(i,j,\lambda_2), R(i,j,\lambda_3), \dots, R(i,j,\lambda_n)]^T$ (superscript T represents transposition), calculation is made to determine an autocorrelation matrix T ($T_{i,j}$, or (i,j) component of T , is $R^T \cdot R/n$) for all pixels in the image or part of them, for example, the pixels that are left intact after pixel elimination at given intervals.

The thus obtained autocorrelation matrix T is a square ($n \times n$) matrix and can be used to determine eigenvalues u_k ($u_1 > u_2 > \dots > u_n$, $k = 1$ to n) and principal component vectors $p_k(\lambda)$ that satisfy the following equation (2). The principal component vectors $p_k(\lambda)$ are orthonormalized eigenvectors and expressed by $[p_k(i,j,\lambda_1), p_k(i,j,\lambda_2), p_k(i,j,\lambda_3), \dots, p_k(i,j,\lambda_n)]^T$ ($k = 1$ to n). Methods for determining eigenvalues and eigenvectors are not limited to any particular types and various known methods may be

employed, as exemplified by the Jacobi method and the power method.

$$T \cdot p_k(\lambda) = u_k p_k(\lambda) \quad (2)$$

As the following equation (3) shows, the spectral reflectance distribution $R(i, j, \lambda)$ at pixel position (i, j) is expressed by principal component vectors $p_k(\lambda)$ ($k = 1$ to n) which are eigenvectors:

$$R(i, j, \lambda) = \sum_{k=1}^n s_k(i, j) p_k(\lambda) \quad (3)$$

Since principal component vectors $p_k(\lambda)$ ($k = 1$ to n) are orthonormal to each other, $s_k(i, j)$ can be determined from the following equation (4):

$$s_k(i, j) = R(i, j, \lambda) \cdot p_k(\lambda) \quad (4)$$

where the dot represents the inner product of n -component vectors for the value of band's spectral reflectance, and $s_k(i, j)$ is the quantity representing the magnitude of the k th principal component vector p_k contained in the spectral reflectance $R(i, j, \lambda)$ of the multispectral image at pixel position (i, j) . The value of $s_k(i, j)$ is calculated at each pixel position and the k th principal component image S_k ($k = 1$ to n) is then determined that has the calculated values

of $s_k(i,j)$ as the image data at the respective pixel positions.

As already mentioned, the contribution made by the first to n th principal components in the spectral reflectance distribution $R(i,j,\lambda)$ decreases with decreasing eigenvalue u_k that accompanies each principal component. Hence, to the extent that it holds the image information in an optimum manner, the spectral reflectance distribution $R(i,j,\lambda)$ can be approximated without the principal component vectors p_k having smaller eigenvalues u_k .

This method of approximation is expressed by the following equation (5); the eigenvalues u_k ($k = 1$ to n) are lined up in decreasing order and the eigenvectors $p_k(\lambda)$ ($k = 1$ to m) which correspond to the first m eigenvalues u_k ($k = 1$ to m) are adopted but the eigenvectors $p_k(\lambda)$ ($k = m+1$ to n) of the smaller eigenvalues are neglected; in this way, the spectral reflectance distribution $R(i,j,\lambda)$ is approximated and the image data is compressed accordingly:

$$R(i, j, \lambda) \doteq \sum_{k=1}^m s_k(i, j) p_k(\lambda) \quad (5)$$

Based on this theory, the optimum principal component number m_1 , or the number of principal component vectors p_k to be adopted that can approximate the spectral reflectance distribution $R(i,j,\lambda)$ without compromising the optimally held image information, is identified and used to compress the tile images T_L . As a result, the image data can be compressed without deteriorating the quality of the multispectral image.

In other words, the optimum principal component number m_1 which serves as a threshold for adopting the principal component vectors $p_k(\lambda)$ ($k = 1$ to m_1) which are eigenvectors of greater eigenvalues u_k but neglecting the eigenvectors $p_k(\lambda)$ ($k = m_1+1$ to n) having smaller eigenvalues and this is set by the following criterion for decision (step 108).

First, substitute the principal component vectors $p_k(\lambda)$ into Eq. (4) in the decreasing order of eigenvalue u_k and determine an approximate spectral reflectance distribution $R'(i,j,\lambda)$ which corresponds to the multispectral image, as expressed by the following equation (6):

$$R'(i, j, \lambda) = \sum_{k=1}^m s_k(i, j) p_k(\lambda) \quad (6)$$

The approximate spectral reflectance distribution $R'(i,j,\lambda)$ is not exactly the same as the spectral reflectance distribution $R(i,j,\lambda)$ and contains some error. However, if this approximate spectral reflectance distribution $R'(i,j,\lambda)$ is multiplied by a specified spectral intensity distribution to provide image information about the composite image, the error presented by this image information with respect to the image information for the original image that is obtained by multiplying the tile images T_L by the specified spectral intensity distribution decreases with the increasing principal component number m . Considering this fact, a specified value is preliminarily set as the criterion for decision and the minimum optimum principal component number m_1 is acquired by determining the principal component number m at which the error between the image information about the composite image as obtained by multiplying the approximate spectral reflectance distribution $R'(i,j,\lambda)$ by a certain spectral intensity distribution and the image information about the original image first becomes smaller

than the specified value which is set as the criterion for decision.

To give an example, the color differences ΔE_0 of colorimetric values L^* , a^* and b^* in the CIE $L^*a^*b^*$ color space under the CIE D_{65} standard illuminant are taken as the error between the image information about the composite image and that about the multispectral image and a specified value is set for each of these color differences ΔE_0 and the minimum optimum principal component number m_1 is determined.

The error may be the square error E_1 of the spectra for all or part of the composite image. In this case, one may determine a minimum value of the optimum principal component number m_1 at which the decrease in the square error E_1 with increasing principal component number m is saturated below a predetermined value.

Thus determined is the minimum optimum principal component number m_1 which holds and optimally represents the image information about each of the tile images T_L and based on this number, one acquires m_1 optimum principal component vectors $p_k(\lambda)$ ($k = 1$ to m_1) corresponding to eigenvalues u_1 to u_{m_1} (u_1 to $u_{m_1} > u_{m_1+1} > \dots > u_n$), as well

as m_1 optimal principal component images S_k ($k = 1$ to m_1). In comparatively many cases, the rejected principal component vectors $p_k(\lambda)$ ($k = m_1+1$ to n) are predominantly composed of the noise component in the tile images T_L and, hence, the noise component in the multispectral image can be suppressed by rejecting the less contributing principal component vectors $p_k(\lambda)$ ($k = m_1+1$ to n) from the tile images T_L .

Thus, in step 108, the optimum principal component number, optimum principal component vectors $p_k(\lambda)$ and the image data for the optimum principal component images S_k are obtained for each of the tile images T_L ($L = 1$ to n_t) and together with the tile image information constructed in step 104, this tile information is sent to the recording medium drive unit 24 where they are recorded and stored on a recording medium such as hard disk, floppy disk, MO, CD-R or DVD (step 110). In the embodiment under consideration, the multispectral image is segmented into tile images T_L and principal component analysis is performed for each tile image T_L and this offers a particular advantage in that if the tile images T_L do not change greatly in hue, lightness or saturation, the optimum principal component number m_1

suffices to be 1 or 2 and this means that only one or two optimum principal component vectors p_k are necessary to hold and optimally represent the image information. As a result, the image data for the multispectral image can be compressed at a higher ratio without sacrificing the quality of the image.

After determining the optimum principal component number m_1 and acquiring both the optimum principal component vectors $p_k(\lambda)$ ($k = 1$ to m_1) and the optimum principal component images S_k ($k = 1$ to m_1) in step 108, the optimum principal component images S_k ($k = 1$ to m_1) may optionally be subjected to further image compression by a suitable technique such as the JPEG (Joint Photographic Experts Group) technique, or compressed to an even higher ratio by huffman coding or any other known arithmetic coding techniques.

Using the above-described multispectral image compressing method and apparatus, the present inventors made an experiment of multispectral image compression in the following manner.

CA-D4-1024A of DALSA (1024 x 1024 pics each sized to 12 x 12 microns; furnished with PCI interface; monochromatic) was used as CCD camera 16, and Varispec

Tunable Filter (liquid-crystal tunable filter of CRI) as variable filter 14. By means of this apparatus, the recording wavelength range of from 380 to 780 nm was divided by 10 nm into 41 bands ($n = 41$). The object O was a person standing outdoors who was recorded with the CCD camera 16 to take a multiband image of the person consisting of 41 band images.

The multiband image storage section 18, multispectral image acquisition unit 20 and multispectral image compressing unit 22 were implemented in a notebook PC (personal computer) of PROSIDE and processing with software was executed on Windows 95 in C++. The CPU in the PC ran at 166 MHz and the RAM had a capacity of 128 Mbytes.

To provide convenience in processing with software, the image data quantization number was changed from 2 bytes to 1 byte in a preliminary treatment, which was not included in the process of compressing the volume of image data to be described below.

First, a multispectral image having 41 constituent wavelength bands was extracted from the multiband image that had been sent to the multispectral image acquisition unit 20. The extracted multispectral image consisting of

1024 x 1024 pixels was segmented into tile images T_L ($L = 1$ to 4096) each consisting of 16 x 16 pixels.

Principal component analysis was performed each of the tile images T_L ($L = 1$ to 4096) to determine principal component vectors $p_k(\lambda)$ ($k = 1$ to 41) and principal component images S_k ($k = 1$ to 41).

Then, in order to determine the optimum principal component number m_1 , a value of 1.5 in terms of the average color difference based on chromaticity in the CIE D1976 $L^*a^*b^*$ color space under the CIE D_{65} standard illuminant was chosen as the criterion for decision. In the decreasing order of eigenvalues u_k obtained by the principal component analysis, the m corresponding principal component vectors $p_k(\lambda)$ ($k = 1$ to m) were sequentially adopted. After reconstructing a composite image on the basis of these principal component vectors p_k , the above-defined average color difference from the original image composed of the tile images T_L was determined and an optimum principal component m_1 was also determined at which the average color difference was below 1.5.

As it turned out, the optimum principal component number m_1 for the tile images T_L ($L = 1$ to 4096) was

between 2 and 6. In the case of the tile image T_B shown in Fig. 3 which is in a blank area that has small changes in hue, lightness and saturation and which is part of the background of the human object O or in the case of a tile image T_L having identical hue, lightness and saturation, the optimum principal component number m_1 was smaller than in the case of the tile image T_A also shown in Fig. 3 and a value of 2 was sufficient; in other words, the tile images T_L could be expressed by the first principal component vector $p_1(\lambda)$ and the second principal component vector $p_2(\lambda)$. When a less stringent criterion was used, the first principal component vector $p_1(\lambda)$ was sufficient to hold and represent the original image information in an optimal way.

In the next step, tile image information is added to the optimum principal component number m_1 , optimum principal component vectors $p_k(\lambda)$ and optimum principal component images S_k for each tile image T_L and the tile image information consists of the tile number of tile image T_L , the tile position on the multispectral image, the tile size (image size) of tile image T_L and the pointer (address) for the tile information consisting of said optimum principal component number m_1 , optimum principal

component vectors $p_k(\lambda)$ and the image data for the optimum principal component images S_k . The combined data is recorded and stored via the recording medium drive unit 24.

As a result, the image data was reduced from about 41 Mbytes to 4 Mbytes, which was less than a tenth of the initial volume. The compressed image data was later retrieved and a composite image was reconstructed but no visual deterioration in image quality was observed.

Obviously, it is clear that the image compressing method according to the first aspect of the invention and the image compressing apparatus using it can compress a plurality of spectral images at a higher ratio, say, about 10:1 without causing any visual deterioration and thus contribute to more efficient handling of image data.

While the multispectral image compressing method and apparatus of the invention have been described above in detail, it should be noted that the foregoing embodiment is not the sole case of the invention and various improvements and modifications are possible without departing from the scope and spirit of the invention.

As described above in detail, according to the present invention, a multispectral image of high data volume is segmented into a plurality of tile images, principal

component analysis is performed for each of the tile images and optimum principal component vectors and images that hold and represent the image information in an optimum way are determined for each tile image and this enables the image data compression ratio to be increased without damaging the image quality, thereby contributing to a higher efficiency in the handling of image data.

As a further advantage, the principal component vectors in the multispectral image can be freed of those portions in which the noise component is predominant and this enables suppression of the noise component.

WHAT IS CLAIMED IS:

1. A method of compressing a multispectral image composed of a plurality of spectral images of an object captured in a wavelength range divided into a plurality of bands, comprising the steps of:

segmenting said multispectral image into a plurality of tile images;

performing principal component analysis on respective tile images to obtain for each tile image a principal component number of sets of principal component vectors and principal component images for the multispectral image;

United States Patent

determining from said plurality of sets, for each tile image, an optimum principal component number of sets of optimum principal component vectors and corresponding optimum principal component images that optimally represent image information about the multispectral image; and

expressing compressed image data for said multispectral image by means of at least said optimum principal component number of sets of optimum principal component images and optimum principal component vectors for each tile image.

2. The method according to claim 1, wherein the compressed image data for said multispectral image are expressed not only by said optimum principal component number of sets of said optimum principal component images and said optimum principal component vectors but also by tile image information having information about tile numbers of said tile images, a tile position and an image size of said tile images.

3. The method according to claim 1, wherein said optimum principal component number is determined based on colorimetric values in a color space.

4. The method according to claim 1, wherein said optimum principal component number is a minimum principal component number at which an absolute value of difference between image information about a composite image that is composed of selected number of sets of said principal component vectors and said principal component images and the image information about an original image that is composed based on said multispectral image is below a specified value or an absolute value of variation in error from said original image which is presented when said composite image is determined by sequentially including in an order of contribution those principal component vectors which make greater contribution to said multispectral image does not exceed a predetermined value.

5. The method according to claim 1, wherein an image size of said tile images in terms of pixel is expressed as a power notation of 2 in both a longitudinal and a transverse direction.

6. The method according to claim 1, wherein said tile images all have an image size in terms of pixel.

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

ABSTRACT OF THE DISCLOSURE

The multispectral image compressing method segments a multispectral image into a plurality of tile images, performs principal component analysis on the respective tile images to obtain for each tile image a plurality of sets of principal component vectors and principal component images for the multispectral image, determines from the plurality of sets, for each tile image, an optimum principal component number of sets of optimum principal component vectors and the corresponding optimum principal component images that optimally represent the image information about the multispectral image, whereby the image data for the multispectral image is compressed to the optimum principal component number, the optimum principal component images and the optimum principal component vectors for each tile image, as well as the relevant tile image information.

2025 RELEASE UNDER E.O. 14176

FIG. 1

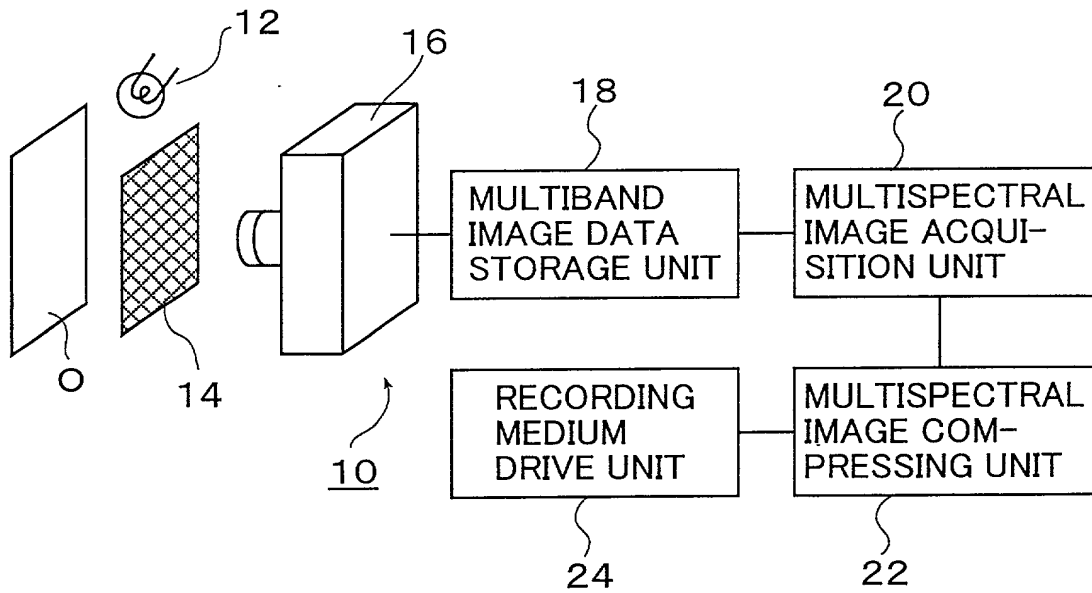


FIG. 2



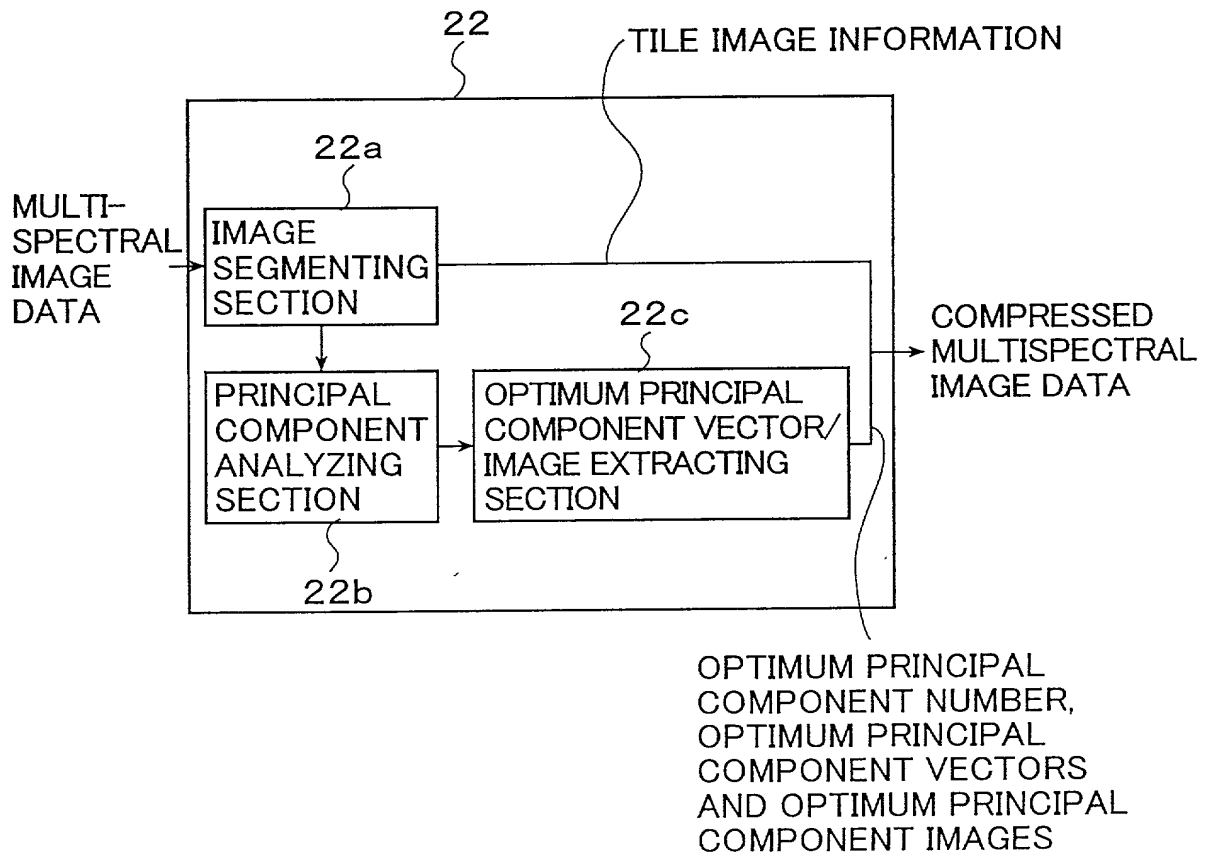


FIG. 3

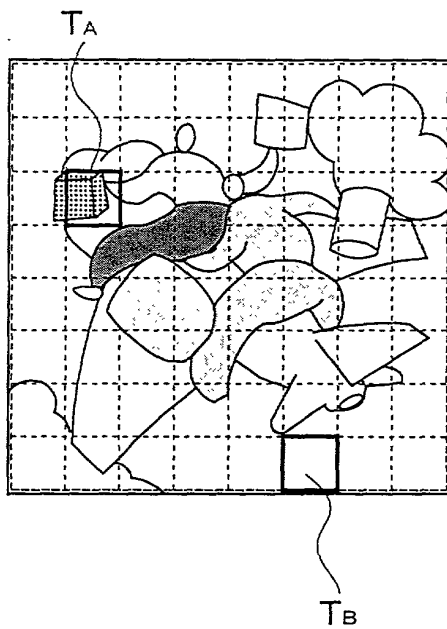

000001-000000

FIG. 4

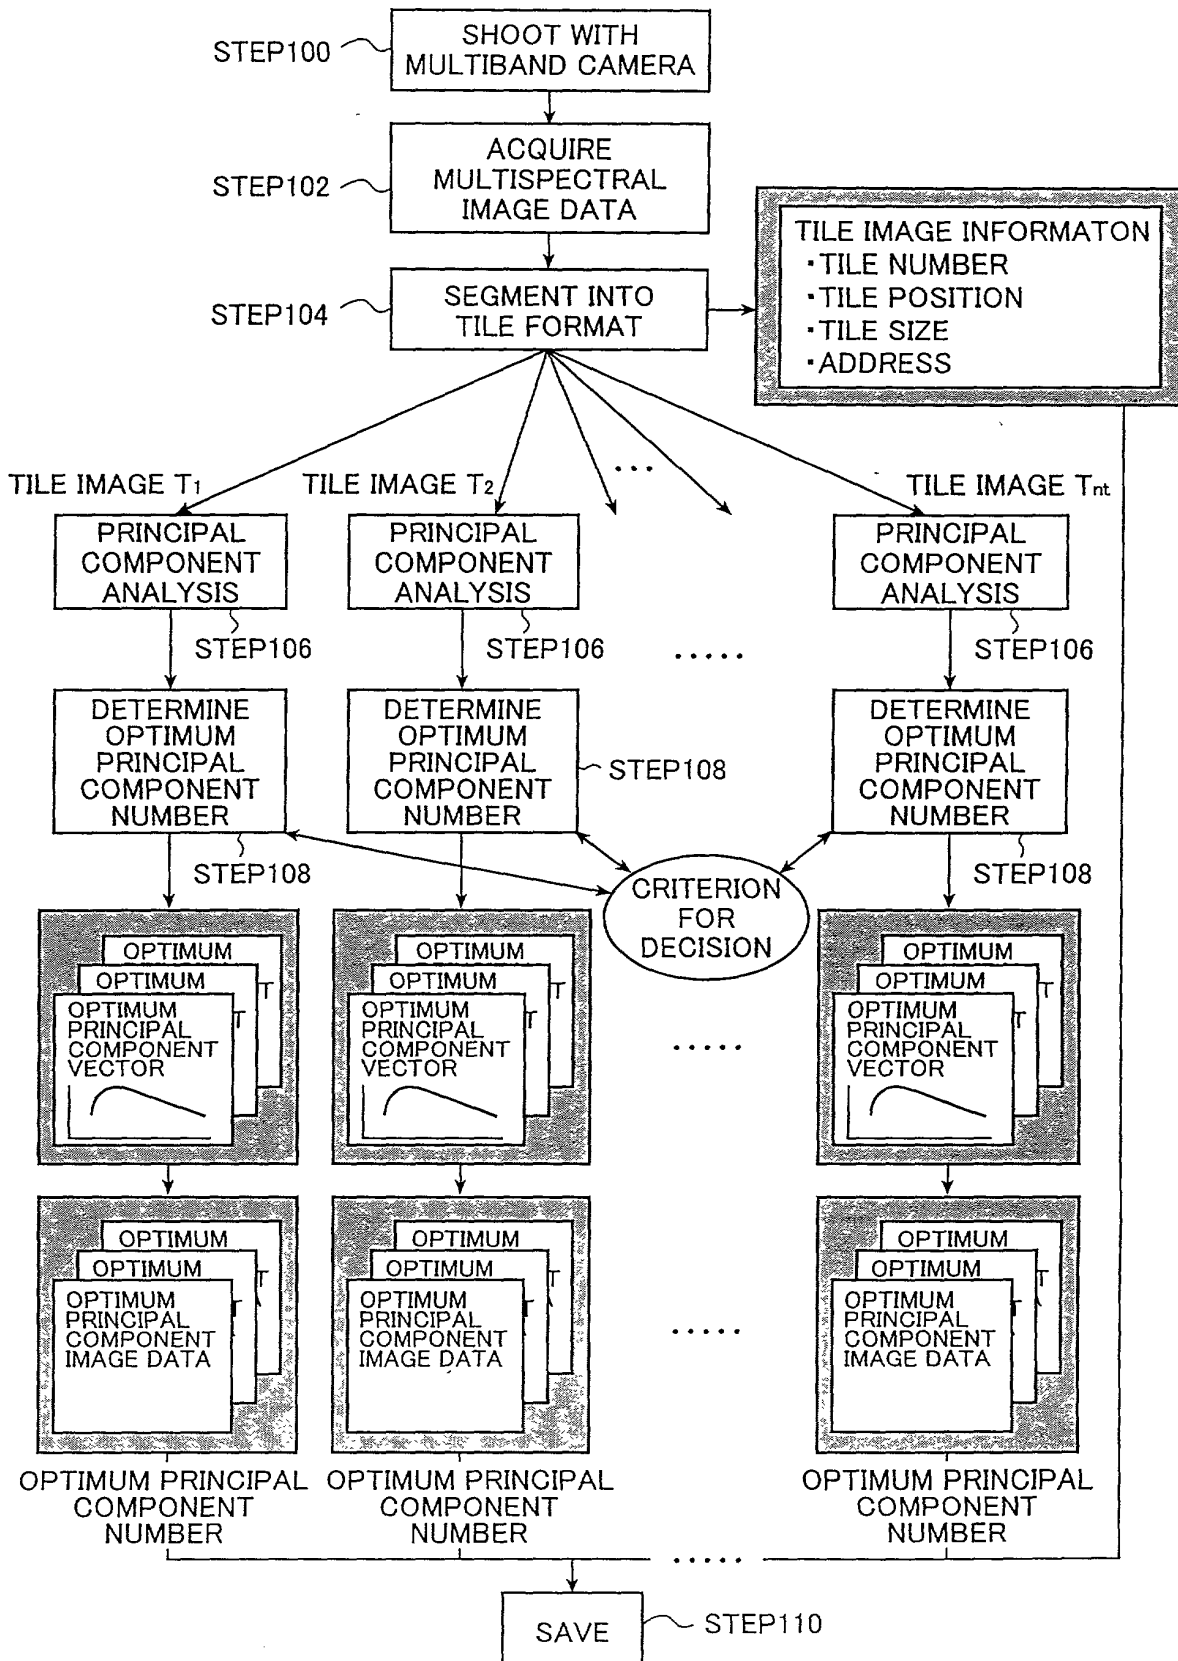

Declaration and Power of Attorney for Patent Application

特許出願宣言書

Japanese Language Declaration

私は、下欄に氏名を記載した発明として、以下の通り宣言する：

As a below named inventor, I hereby declare that:

私の住所、郵便の宛先および国籍は、下欄に氏名に続いて記載したとおりであり、

My residence, post office address and citizenship are as stated below next to my name,

名称の発明に関し、請求の範囲に記載した特許を求める主題の本来の、最初にして唯一の発明者である（一人の氏名のみが下欄に記載されている場合）か、もしくは本来の、最初にして共同の発明者である（複数の氏名が下欄に記載されている場合）と信じ、

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR

COMPRESSING MULTISPECTRAL IMAGES

その明細書を
（該当するほうに印を付す）

the specification of which
(check one)

☐ ここに添付する。

☒ is attached hereto.

☐ _____ 日に出願番号

☐ was filed on _____ as

第 _____ 号として提出し、

Application Serial No. _____

_____ 日に補正した。
（該当する場合）

and was amended on _____
(if applicable)

私は、前記のとおり補正した請求の範囲を含む前記明細書の内容を検討し、理解したことを陳述する。

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37部第1章第56条(a)項に従い、本願の審査に所要の情報を開示すべき義務を有することを認める。

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

Japanese Language Declaration

私は、合衆国法典第35部第119条、第172条、又は第365条に基づく下記の外国特許出願又は発明者証出願の外国優先権利益を主張し、さらに優先権の主張に係わる基礎出願の出願日前の出願日を有する外国特許出願又は発明者証出願を以下に明記する：

Prior foreign applications
先の外国出願

11-297895	Japan	20 / 10 / 1999
(Number)	(Country)	(Day/Month/Year Filed)
(番号)	(国名)	(出願の年月日)
(Number)	(Country)	(Day/Month/Year Filed)
(番号)	(国名)	(出願の年月日)
(Number)	(Country)	(Day/Month/Year Filed)
(番号)	(国名)	(出願の年月日)
(Number)	(Country)	(Day/Month/Year Filed)
(番号)	(国名)	(出願の年月日)
(Number)	(Country)	(Day/Month/Year Filed)
(番号)	(国名)	(出願の年月日)

Priority claimed

優先権の主張

<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yes	No
あり	なし
<input type="checkbox"/>	<input type="checkbox"/>
Yes	No
あり	なし
<input type="checkbox"/>	<input type="checkbox"/>
Yes	No
あり	なし
<input type="checkbox"/>	<input type="checkbox"/>
Yes	No
あり	なし
<input type="checkbox"/>	<input type="checkbox"/>
Yes	No
あり	なし

私は、合衆国法典第35部第120条に基づく下記の合衆国特許出願の利益を主張し、本願の請求の範囲各項に記載の主題が合衆国法典第35部第112条第1項に規定の態様で先の合衆国出願に開示されていない限度において、先の出願の出願日と本願の国内出願日又はPCT国際出願日の間に公表された連邦規則法典第37部第1章第56条(a)項に記載の所要の情報を開示すべき義務を有することを認める。

I hereby claim the benefit of Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose any material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)
(出願番号)

(Filing Date)
(出願日)

(現況) (Status)
特許済み、係属中、放棄済み (patented, pending abandoned)

(Application Serial No.)
(出願番号)

(Filing Date)
(出願日)

(現況) (Status)
特許済み、係属中、放棄済み (patented, pending abandoned)

私は、ここに自己の知識に基づいて行った陳述がすべて真実であり、自己の有する情報及び信ずるところに従って行った陳述が真実であると信じ、更に故意に虚偽の陳述等を行った場合、合衆国法典第18部第1001条により、罰金もしくは禁固に処せられるか、又はこれらの刑が併科され、又はかかる故意による虚偽の陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以上の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true; and further that all statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Japanese Language Declaration

委任状： 私は、下記発明者として、以下の代理人をここに
 送任し、本願の手続きを遂行すること並びにこれに関する一
 切の行為を特許商標局に対して行うことを委任する、
 (代理人氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby
 appoint the following attorney(s) and/or agent(s) to
 prosecute this application and transact all business in the
 Patent and Trademark Office connected therewith. (list
 name and registration number)

I hereby appoint John H. Mion, Reg. No. 18,879; Donald E. Zinn, Reg. No. 19,046; Thomas J. Macpeak, Reg. No. 19,292;
 Robert J. Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olaxy, Reg.
 No. 24,513; J. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Robert G. McMorrow, Reg. No. 19,093;
 Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,200; David J. Cushing, Reg. No. 28,703; John R. Inge, Reg. No.
 26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon I. Landsman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710;
 Howard L. Bernstein, Reg. No. 25,665; Alan J. Kasper, Reg. No. 25,426; Kenneth J. Burchfiel, Reg. No. 31,333; Gordon Kit,
 Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484; Mark Boland, Reg. No. 32,197; William
 H. Mandir, Reg. No. 32,156; Scott M. Daniels, Reg. No. 32,562; Brian W. Hannon, Reg. No. 32,778; Abraham J. Rosner, Reg.
 No. 33,276; Bruce E. Kramer, Reg. No. 33,725; Paul F. Neils, Reg. No. 33,102; and Brett S. Sylvester, Reg. No. 32,765, my
 attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and
 request that all correspondence about the application be addressed to SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC, 2100
 Pennsylvania Avenue, N.W., Washington, D.C. 20037-3202.

書類の送付先：

Send Correspondence to:

SUGHRUE, MION, ZINN, MACPEAK & SEAS
 2100 Pennsylvania Avenue, N.W., Washington, D.C. 20037

直通電話連絡先： (名称及び電話番号)

Direct Telephone Calls to: (name and telephone number)

(202)293-7060

唯一の又は第一の発明者の氏名	Full name of sole or first inventor
	Hideyasu ISHIBASHI
同発明者の署名	Inventor's signature
日付	Date
	Hideyasu Ishibashi Oct. 16, 2000
住所	Residence
	Kanagawa, Japan
国籍	Citizenship
	Japanese
郵便の宛先	Post office address
	c/o Fuji Photo Film Co., Ltd., 210, Nakanuma, Minami-ashigara-shi, Kanagawa, Japan
第二の共同発明者の氏名 (該当する場合)	Full name of second joint inventor, if any
同第二発明者の署名	Second inventor's signature
日付	Date
住所	Residence
国籍	Citizenship
郵便の宛先	Post office address

(第三又はそれ以降の共同発明者に対しても同様な情報
 および署名を提供すること。)

(Supply similar information and signature for third and
 subsequent joint inventors.)